


QuickTool Changer Series FOUK-QTC

QTC50



Static Torque



Accessories	Prcture	Module Type	Model	Compatible Models	Parameters
-------------	---------	-------------	-------	-------------------	------------




Electrical Module	Signal Module	EM-19-M	QTC50-M (Robot Side)	50V, 3A, 19-pin
	Communication Module	EM-TR-M	QTC50-M (Robot Side)	60V, 2A, 100Mbit/s
	Power Module	EM-P-M	QTC50-M (Robot Side)	300/500V(AC/DC), 13A, 14-pin

Accessories	Prcture	Type of medium	No. of fluid feed-throughs	Max. operating pressure	Model	Compatible Models
Air Module		Air, vacuum	8 × M5	0.8Mpa	PF-LM-M5-8	QTC50-M (Robot Side)




Accessories	Prcture	Model	Compatible Models	Parameters
Cable		EM-50V-19-LW4	EM-19-M(Robot Side)	19-pin,Cable length 4m Right-Angle

Accessories	Prcture	Model	Function	Parameters	Recommended Quantity
Sensor		HS2-S04-P01	Quick-Change (Open/Close)Detection (NO),3-pin,Cable length2m,PNP		3

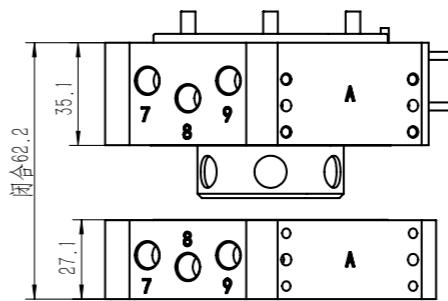

- (A) A-side Module Mounting Surface
- (B) B-side Module Mounting Surface
- (C) Compressed Air Connection
- (D) Pneumatic feed-throughs
- (E) Inductive Proximity Sensor Location
- (F) Quick-change Surface Fitting Detection Position
- (1) Hex Socket Counterbore Screw (Standard)
- (2)(3) Robot Side Locating Hole
- (4) Tool Side Locating Hole
- (5) Tool Side Mounting Hole

QTC50-M

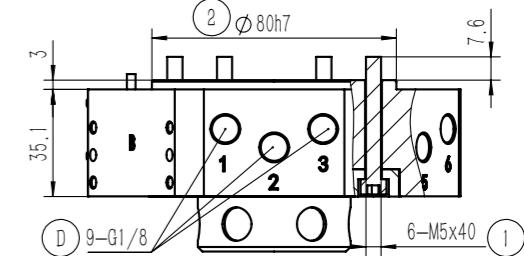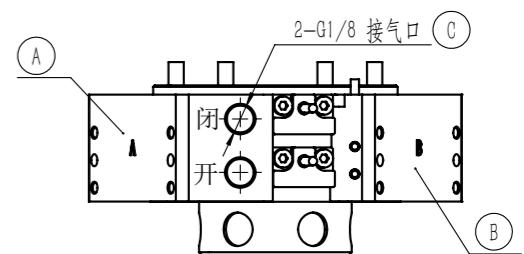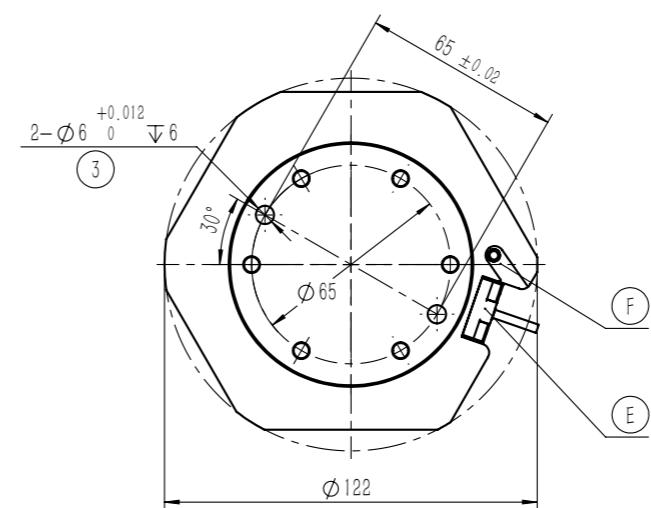

QTC50-T

