

Flexible compensation unit series FOUK-HT

ZG12



HT - ZG12

Serial No.

Specific model



HT Flexible unit compensation

Inductive proximity sensor

IPSD-2NS-0823-L3	Inductive, NPN, 3-core3m
IPSD-2PS-0823-L3	Inductive, PNP, 3-core3m

Product attributes	HT-ZG12	HT-ZG25	HT-ZG32	HT-ZG40	HT-HE40	HT-HE50	Unit
Supporting products	TG12-FZ34/FR28 TG25-FZ42/FR36 TG32-FZ55/FR45 TG40-FZ70/FR57 TE40-FR36-96 TE50-FR45-120						
Guide pattern	Linear bearing	Linear bearing	Linear bearing	Linear bearing	Linear slide rail	Linear slide rail	
Weight	0.65	1.85	2.3	4.3	2.9	4.6	kg
Sensing stroke range	6~9	7~11	7~11	8~12	7~10	8~12	mm
Spring thrust range	3~8	5~14	8~20	10~25	6~16	8~20	kgf
Spring type	Rectangular/circularsection	Rectangular/circularsection	Rectangular/circularsection	Rectangular/circularsection	Rectangular/circularsection	Rectangular/circularsection	



HT-ZG12

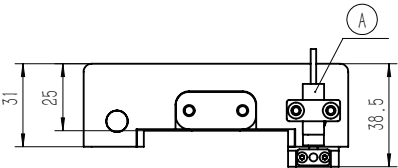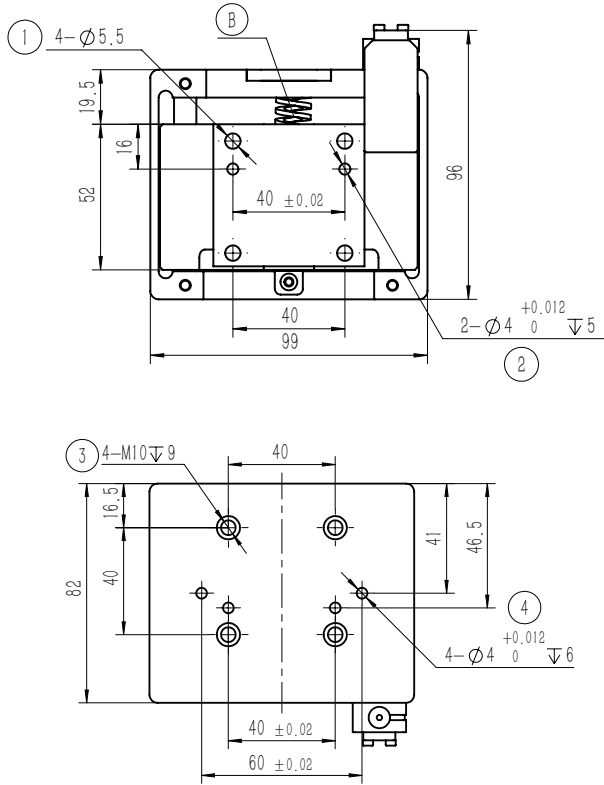

- ① Through hole for mounting gripper
- ② Positioning for mounting gripper
- ③ Threaded hole for mounting truss
- ④ Positioning for mounting truss
- A Pushing test
- B Thrust spring

Note: The standard version of the product does not include the sensor, which is an optional item.

HT-ZG25

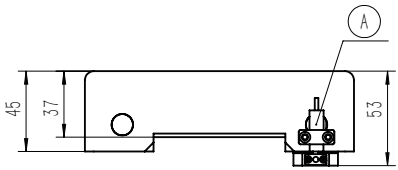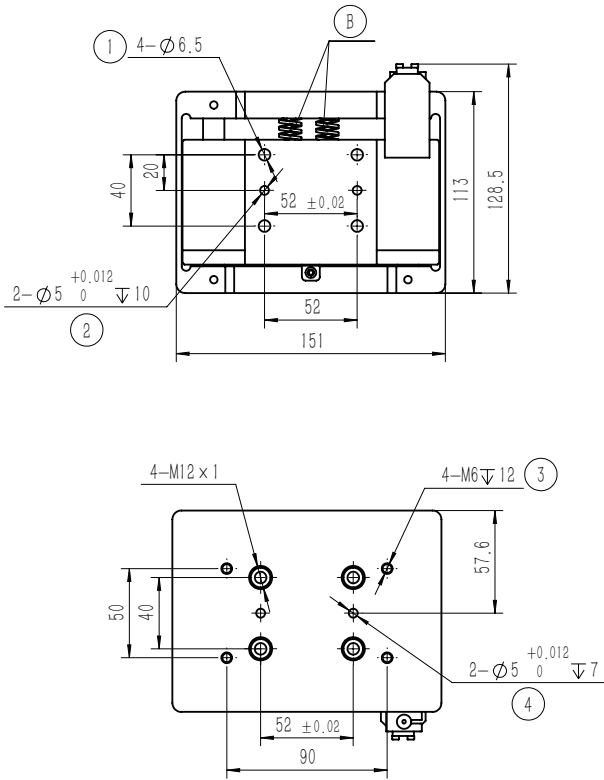

- ① Through hole for mounting gripper
- ② Positioning for mounting gripper
- ③ Threaded hole for mounting truss
- ④ Positioning for mounting truss
- A Pushing test
- B Thrust spring

Note: The standard version of the product does not include the sensor, which is an optional item.