

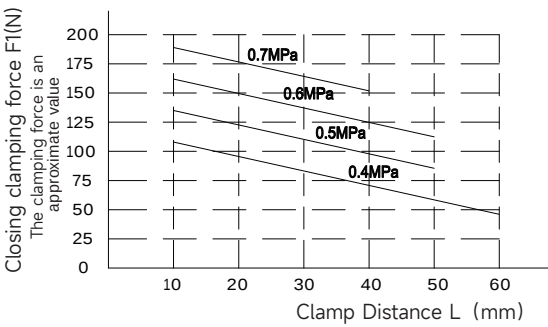








■ Clamping force TR20-51

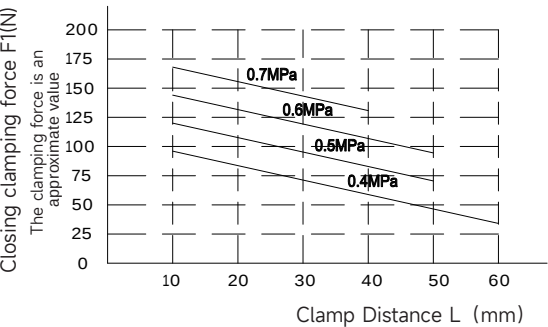

Note: The standard version of the product does not include proximity sensor, which are options.

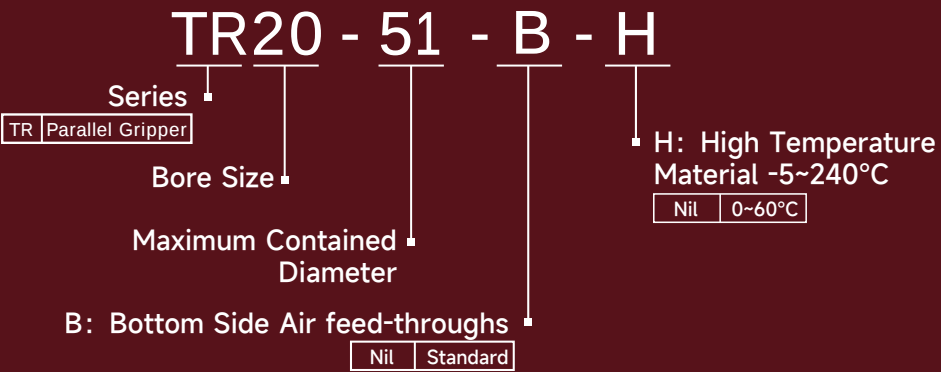

TR20-51

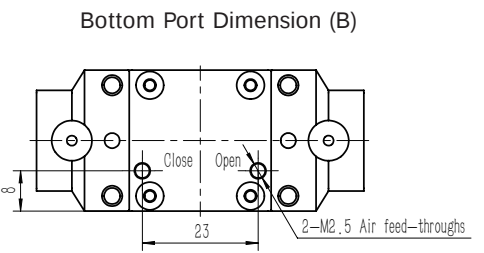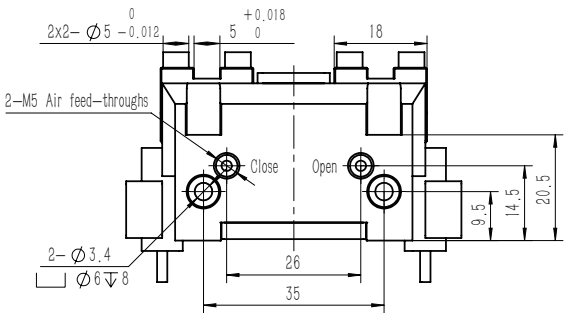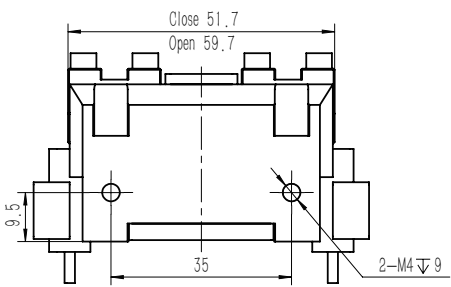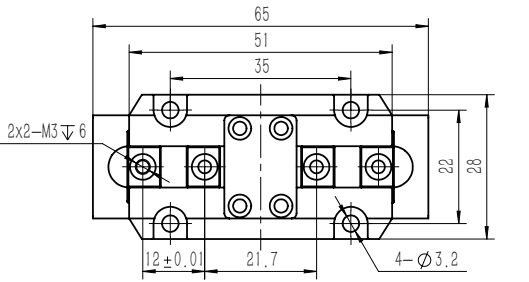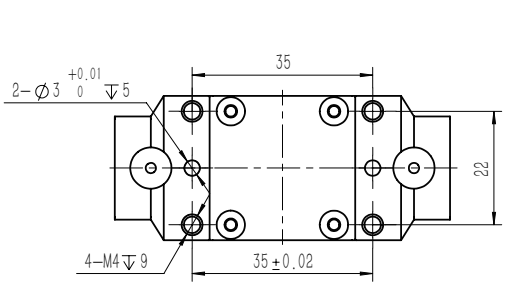

Recommended connecting flange size, $\phi 5.5 \pm 0.4$, seal ring $\phi 2.5 \times 1.5$

■ Technical parameter

Product properties	TR20-51	Unit
Single stroke	4	mm
Weight	0.15	kg
Max. clamp pistance	60	mm
Fitting size	M5	
Girpping force: open/close	27*P/24*P	N
Workpiece weight	0.6	kg

Product properties	TR20-51	Unit
Continuation max frequency	50	cpm
Repeat accuracy	±0.02	mm
Air pressure	4~7	bar
Ambient temperature	0~60	°C
IP grade	45	

P: Air Pressure [bar]